




APPLICATIONS:

APPLIANCE | ELECTRICAL | HVAC/R | MARINE | POOL & SPA | RV

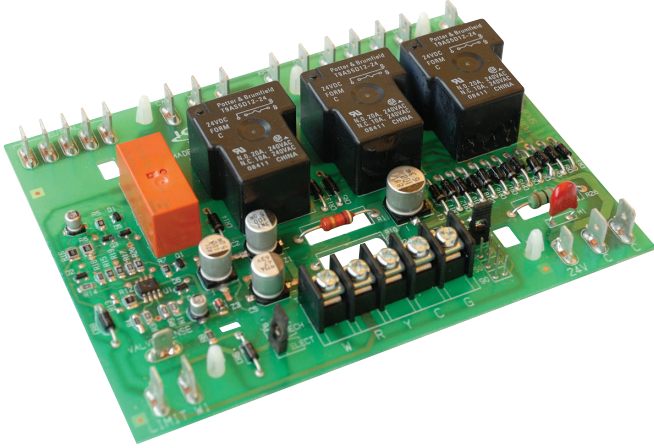

REPLACES

- **Lennox:** Replaces all BCC1, BCC2 and BCC3 circuit boards, including models LB-53622A, BCC2-2REV8, 35K77, 35K7701, LB-90089A, 65K29, 65K2901, LB-50709BD, LB-65126A, LB-89859, LB-87086A, LB-87086, LB-63622AA, LB-90676A, 40L8801, 30H6701, 48K98, 48K9801, 45K48, 45K4801, 78J61, 78J6101, 68H08.

FEATURES

- ✓ Low cost, form, fit and functional replacement board for Lennox
- ✓ Controls inducer fan motor, blower fan and monitors limit switches
- ✓ Microprocessor based design
- ✓ Functions with all 24 VAC thermostats

SPECIFICATIONS

- **Voltage range:** Line (98 to 132 VAC) @ 60 Hz
- **Cool blower:** 20A @ 120 VAC
- **Heat blower:** 20A @ 120 VAC
- **Inducer motor:** 5A @ 120 VAC
- **Cool blower ON delay:** 1 second
- **Cool blower OFF delay:** 1 second
- **Heat blower ON delay:** 45 seconds
- **Heat blower OFF delay:** 90, 150, 210, 270 seconds

Content and specifications on sell sheets subject to change without notice.